



#### **Smart Detection**

Differentiate people, vehicles, and animals from other trivial things.



## **Color Night Vision**

See through the night in full color with its spotlight on.



#### **Local Storage**

Save your recordings to a micro SD card of up to 256GB.



#### **Accurate Alerts**

Receive instant alerts once something suspicious is happening.



#### **Time Lapse**

View long-time processes such as sunrise in a short video.



#### **IP67 Weatherproof**

Performs well in any weather conditions with its rugged housing.



#### **4K UHD**

Deliver 4K sharp images day and night with rich details.



#### **Power over Ethernet**

Transmit data and power with only one Ethernet cable.



#### **Remote Access**

Live view your footage anytime anywhere via Reolink App/Client.






## True-to-Life Images in 4K

Capture super sharp 4K videos with mind-blowing details, day or night. Never miss anything important.



#### **Focus on True Threats**

Differentiate people, vehicles, and animals from other objects and send alerts straight to your phone, so nothing important goes unnoticed.

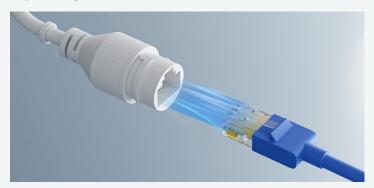


## PoE, Setup in Minutes

Transmit videos and be charged simultaneously via only one network cable. Setup is easier with no messy cables.



## See Through the Night in Colors

Fuzzy and pixelated night vision is now history. The powerful spotlight that keeps on all night makes the night as colorful as day.

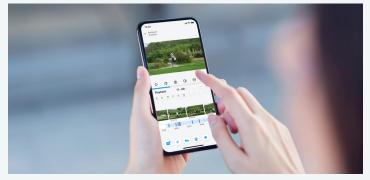

## Your World at Your Fingertips

With a few clicks on Reolink App or Client, watch live feed, be informed of the emergency, replay key moments and more – from anywhere, anytime.




# **Gallery**







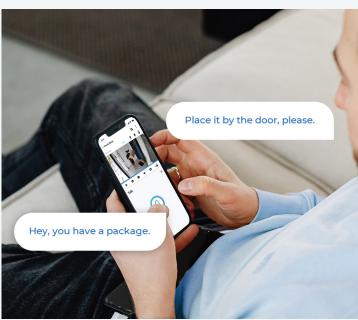

# One App/Client for All Control

Stay connected to your home or business anytime, anywhere.



# **Privacy in Your Hands**

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.





| Model                  | P330                  |   |
|------------------------|-----------------------|---|
| Video & Audio          | Image Sensor          | 1/2.49" CMOS Sensor   |
|                        | Video Resolution      | 3840x2160 (8.0 Megapixels) at 25fps   |
|                        | Lens                  | f=4.0mm fixed; F=2.0, with IR-cut filter  |
|                        | Video Format          | H.265   |
|                        | Field of View         | Horizontal: 105°  Vertical: 56°   |
|                        | Day & Night           | Auto-switching with IR-cut filter   |
|                        | Infrared Night Vision | 30 meters (100ft) (LED: 18pcs/14mil/850nm)  |
|                        | Color Night Vision    | Spotlight: 1pcs   |
|                        | Audio                 | Audio recording   |
| Power                  | POE                   | IEEE 802.3af, 48V Active  |
|                        | DC Power              | DC 12.0V=1A, <12W   |
| Interface              | Power                 | DC power port   |
|                        | System                | Reset button  |
|                        | Ethernet              | One 10M/100Mbps; RJ45   |
|                        | Storage               | microSD card slot (support up to 256GB)   |
|                        | Audio                 | Built-in microphone   |
| Software Features      | Frame Rate            | Mainstream: 2fps - 25fps (default: 25fps) Substream: 4/7/10/15fps (default: 10fps)  |
|                        | Code Rate             | Mainstream: 4096Kbps - 8192Kbps (default:6144Kbps)<br>Substream: 64Kbps - 512Kbps (default: 256Kbps)                                    |
|                        | Browser Supported     | Edge, Chrome, Firefox, Safari   |
|                        | OS Supported          | PC: Windows, Mac OS; Smartphone: iOS, Android   |
|                        | Smart Alarm           | Motion detection; person detection; vehicle detection; animal detection   |
|                        | Record Mode           | Motion-triggered recording (default); scheduled recording; 24/7 recording   |
|                        | Protocol & Standard   | HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP,<br>RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P  |
|                        | Maximal User Access   | 20 users (1 admin account & 19 user accounts);<br>support up to 12 simultaneous video streams (10 substreams & 2<br>mainstreams)        |
|                        | Smart Home            | Google Assistant  |
| Working<br>Environment | Temperature           | Operating temperature: -10°C - +55°C (14°F - 131°F)   |
|                        | Humidity              | Operating humidity: 10% ~ 90%   |
|                        | Waterproof            | IP67  |
| Size & Weight          | Dimensions            | 68 x 63 x 188mm   |
|                        | Weight                | 452.4g  |
| Warranty               | Limited Warranty      | 2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a> . |





- 1 Mount 2 Metal Aluminum Case 3 Daylight Sensor
- 4 Spotlight 5 High Definition Lens 6 IR LEDs



- 1 Power 2 Reset Button 3 Network
- 4 Waterproof Lid



## **Best Companion**



PoE Injector



microSD Card



Reolink NVR



**Ethernet Cable** 



Waterproof Lid



**RLA-POECS1** (Combiner & Splitter)



Junction Box B10

## **Download Free Reolink App & Client**

Learn more: https://reolink.com/software-and-manual/









## **Terms and Privacy**

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

## **Limited Warranty**

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: https://reolink. com/warranty-and-return/